

An Oil for Every Season!

2012 - 2013




AMERICAN LUBRICATING COMPANY

"Blending Engineering Excellence with Family Pride"

500 Industrial Park Drive • Selmer, TN 38375 • USA
Phone: +1.901.283.1950 • Email: chip@spectrumcorporation.com • www.americanlubricating.com





ALCO's SYNTHETIC NO SMOKE TWO STROKE

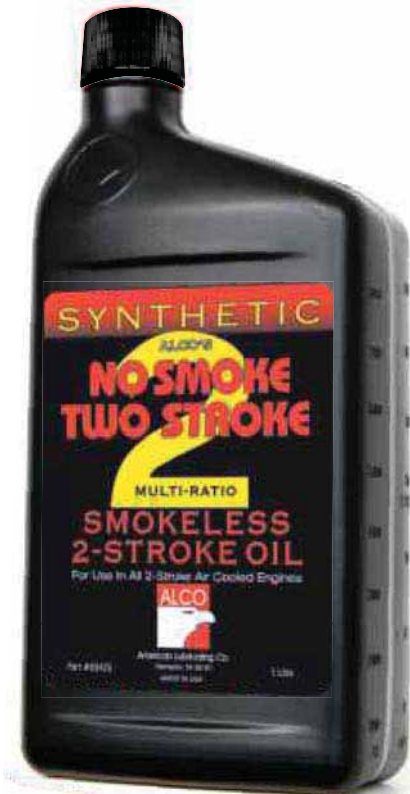

1 Litre
PART #03425



100 mL
PART #00125EU

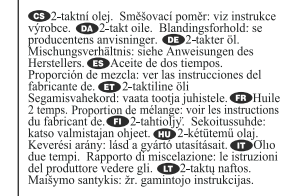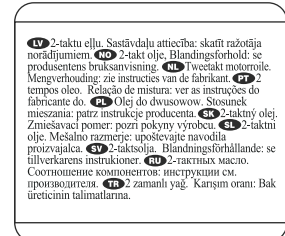

Back Label

ALCO'S SYNTHETIC NO SMOKE TWO STROKE OIL is a premium synthetic air cooled two stroke oil which represents the newest generation in small engine lubricating technology. It significantly increases performance by virtually eliminating exhaust port blocking. Engine overheating due to blocked exhaust ports is a leading cause of engine failure. By allowing exhaust gases to escape more readily, the engine is able to exchange more fresh air, producing maximum power. This means that the engine runs at maximum RPMs for much longer periods of time. Other important benefits include reduced exhaust smoke, emissions, particulate matter, air pollutants, muffler gumming, and spark plug fouling. *Passes OEM approved specification ISO-L-EGD and JASO FD.*

- Superior performance with unleaded gas
- Excellent anti-corrosion performance
- Virtually no carbon build-up
- Incredible anti-seizure protection
- Remarkably less exhaust port clogging
- Significantly less piston scuffing

ALCO'S SYNTHETIC NO SMOKE TWO STROKE OIL is a multi-ratio formula and is recommended for all air cooled two stroke engines. It meets or exceeds the following OEM and industry tests and specifications: API-TC, ISO-L-EGD, JASO FD, TISI Specifications.

- Reduced downtime
- Amazingly low deposit formations
- Less Particulate Matter (PM) pollutants
- Safer for the equipment operator
- Increased engine life

CONTAINER SIZE:	12/1 Litre case	48/100 mL case
CASE DIMENSION - CM (LWH):	30 x 28 x 24	32 x 27 x 11
CASES PER PALLET:	98	192
KILOGRAMS PER CASE:	12	8




ALCO'S SEMI-SYNTHETIC NO SMOKE TWO STROKE



1 Litre
PART #03325EU



1 Litre
Easy Squeeze
PART #03322EU

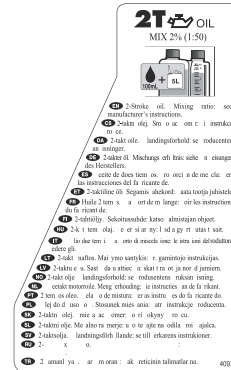

Back Label



100 mL
PART #00325EU

ALCO's NO SMOKE TWO STROKE is a semi-synthetic smokeless two stroke oil specifically blended for chain saws, motorcycles, lawnmowers, string trimmers, blowers, and all other air cooled two cycle engines. NO SMOKE TWO STROKE is safer for the environment and the equipment operator because it eliminates polluting exhaust smoke. When tested against OEM reference oil NO SMOKE TWO STROKE showed:

- Excellent anti-corrosion performance
- Superior performance with unleaded gas
- Virtually no carbon build-up
- Incredible anti-seizure protection
- Remarkably less exhaust port clogging
- Significantly less piston scuffing
- Reduced downtime

- Amazingly low deposit formations
- Less Particulate Matter (PM) pollutants
- Safer for the equipment operator
- Increased engine life
- Meets OEM Approved Global Oil Specification ISO-L-EGD and JASO FD

ALCO's NO SMOKE TWO STROKE meets the severe OEM approved Global air cooled engine oil classification of JASO FD and

recommended for all air cooled two stroke engines. It is formulated to mix with unleaded gas and is compatible with all oxygenated fuels. NO SMOKE TWO STROKE is a multi-ratio product and gives excellent results in all air cooled two stroke engines. For oil injector systems, fill oil reservoir.

CONTAINER SIZES:	12/1 Litre case	12/1 Litre EZ Squeeze bottle	48/100 mL case
DIMENSIONS-CM (LWH):	30 x 28 x 24	37 x 25 x 24	32 x 27 x 11
CASES PER PALLET:	98	80	192
KILOGRAMS PER CASE:	12	12	8



ALCO'S MULTI-MIX UNIVERSAL TWO STROKE OIL



1 Litre
PART #11033EU



100 mL
PART #11009EU

- EN** 2-Stroke oil. Mixing ratio: see manufacturer's instructions.
CS 2-taktní olej. Směšovací poměr: viz instrukce výrobce.
DA 2-takt olie. Blandingsforhold: se producentens anvisninger.
DE 2-takter öl. Mischungsverhältnis: siehe Anweisungen des Herstellers.
ES Aceite de does tiempos. Proporción de mezcla: ver las instrucciones del fabricante de.
ET 2-taktiline õli. Segamisvahetord: vaata tootja juhistele.
FR Huile 2 temps. Rapport de mélange: voir les instructions du fabricant de.
FI 2-tahtiöljy. Sekoitussuhde: katso valmistajan ohjeet.
HU 2-kétütemű olaj. Keverési arány: lásd a gyártó utasításait.
IT Olio due tempi. Rapporto di miscelazione: le istruzioni del produttore vedete gli.
LT 2-taktnų naftos. Maišymo santykis: žr. gamintojo instrukcijas.
LV 2-taktu eļļa. Sastāvdaļu attiecība: skatīt ražotāja norādījumus.
NO 2-takt olje. Blandingsforhold: se produsentens bruksanvisning.
NL Twee-takt motorolie. Mengverhouding: zie instructies van de fabrikant.
PT 2 tempos oleo. Relação de mistura: ver as instruções do fabricante do.
PL Olej do dwusowow. Stosunek mieszania: patrz instrukcje producenta.
SK 2-taktný olej. Zmiešavací pomer: pozri pokyny výrobcu.
SL 2-taktni olje. Mešalno razmerje: upoštevajte navodila proizvajalca.
SV 2-taktsolja. Blandningsförhållande: se tillverkarens instruktioner.
RU 2-тактных масло. Соотношение компонентов: инструкции см. производителя.
TR 2 zamanlı yağ. Karışım oranı: Bak üreticinin talimatlarına.

4133

Back Label

MULTI-MIX UNIVERSAL TWO STROKE ENGINE OIL is a superior quality two stroke oil especially designed for high speed air cooled engines in lawn and garden equipment including chain saws, string trimmers, lawnmowers, brush cutters, snowmobiles and motorcycles. Controlled manufacturing procedures, high quality base oils, and a highly concentrated additive package allow one bottle of 100 ml. MULTI-MIX to mix with five litres of gasoline and meet the requirements of all air cooled engines regardless of the specific mixing ratio suggested by the engine manufacturer.



MULTI-MIX meets API air cooled oil specification TC and incorporates the following good properties:

- **Sta-Mixed Additives - Ensures lubrication even after prolonged storage.**
- **Quality Base Oils - For maximum lubrication with minimum carbon build-up.**
- **Colored Oil - See at a glance that oil has been added to your gas.**
- **Alcohol Compatible - Outstanding performance with all oxygenated fuels.**

MULTI-MIX is packaged in a consumer-oriented compact plastic bottle which:

- **Maximizes shelf space**
- **Minimizes container waste**
- **Reduces transportation cost**
- **Permits blister packaging possibilities**
- **Allows for flexible private labeling potential**

CONTAINER SIZE:	12/1 Litre case	48/100 mL case
CASE DIMENSION - CM (LWH):	30 x 28 x 24	32 x 27 x 11
CASES PER PALLET:	98	192
KILOGRAMS PER CASE:	12	8



ALCO'S SUPER-LUBE 4-CYCLE LAWNMOWER OIL



4 Litres
PART #02035



1.4 Litres
PART #04830EU



1 Litre
PART #03330EU



600 mL
PART #02030EU

SUPER-LUBE 4-CYCLE LAWNMOWER OIL is a High Detergent SAE 30 API SJ/CD motor oil especially designed for small air cooled 4-cycle engines. This includes many lawnmowers, generators, garden tractors, tillers, and other 4-cycle engines. SUPER-LUBE 4-CYCLE LAWNMOWER OIL meets the warranty requirements of Briggs & Stratton, Honda, Tecumseh, and other engine manufacturers. **NOTE: This oil is not designed to mix with fuel. Always follow equipment manufacturers' recommendations.**


CONTAINER SIZES:	4/4 Litre case	8/1.4 Litre case	12/1 Litre case	12/600 mL case
DIMENSIONS-CM (LWH):	38 x 25 x 28	35 x 25 x 23	30 x 28 x 24	25 x 23 x 24
CASES PER PALLET	60	78	98	125
KILOGRAMS PER CASE:	16	11	12	8

4-T OIL SAE 30

- EN** 4-Stroke oil. See manufacturer's instructions.
- CS** 4-taktní olej. Viz instrukce výrobce.
- DA** 4-takts olie. Se producentens anvisninger.
- DE** 4-taktöl. Siehe Anweisungen des Herstellers.
- ES** Aceite de 4 tiempos. Ver las instrucciones del fabricante de.
- ET** 4-taktiline õli. Vaata tootja juhisteid.
- FR** Huile 4 temps. Voir les instructions du fabricant de.
- FI** 4-tahttiliöljy. Valmistajan ohjeet.
- HU** 4-k t tem olaj. sd a gy rt utasít saít.
- IT** Olio 4 tempi. e istruzioni del produttore vedete gli.
- LT** 4-taktnis naftos. r. gamintojo instrukcijas.
- LV** 4-taktu e u. Skat t ra ot ja nor d jumien.
- NO** 4-takts olje. Se produsentens bruksanvisning.
- NL** 4-takt motorolie. Zie instructies van de fabrikant.
- PT** 4 tempos oleo. Ver as instruções do fabricante do.
- PL** 4-suwowych Olej. Patrz instrukcje producenta.
- SK** 4-taktní olej. Pozri pokyny výrobcu.
- SV** 4-taktni olje. Upseftvajte navodila proizvajalca.
- SJ** 4-taktsolja. Se tillverkarens instruktioner.
- SL** 4- o.
- TR** 4 zamanlı ya . ak reticinin talimatlarına.

4136

Back Label



ALCO'S SUPER-LUBE BAR & CHAIN OIL



20 Litres
PART #10005



4 Litres
PART #10004EU



1 Litre
PART #10033EU


SUPER-LUBE BAR & CHAIN OIL is a special blend of virgin oils & tackiness agents. This premium product has low sulfur content and is generally regarded as "The Best Oil on the Market."

NOTE: SUPER-LUBE BAR & CHAIN OIL is for use in chain oil reservoirs for chain saws and not for crankcase use.

CONTAINER SIZES:	20 Litre Pail	4/4 Litre case	12/1 Litre case
DIMENSIONS-CM (LWH):	30x 30 x 40	38 x 25 x 28	30 x 28 x 24
PAILS PER PALLET:	48	60	98
KILOGRAMS PER CASE:	20	16	12

- EN Bar and Chain Oil – not for engine use
- CS Retězec olej - ne pro použití motoru
- DA Kædeolie - ikke til motor brug
- DE Kettenöl - nicht in Motor verwenden
- ES Aceite de la cadena - no para el uso del motor
- ET Ketitõli - ei kasuta mootori
- FI Teräketjuöljy- Ei moottorikäyttöön.
- FR Huile pour chaîne - ne pas utiliser dans le moteur
- GR Μπαρ και λάδι αλυσίδας - δεν χρησιμοποιείται σε κινητήρα
- HR Ulje za podmazivanje mača i lanca - ne koristite u motoru
- HU Láncenkőolaj - ne használja a motor
- IT Olio lubrificante per barra e catena - non usare nel motore
- LT Grandinės tepimo alyva - nenaudokite variklio
- LV Kēžu eļļa - neizmantojiet dzinēja
- NO Kjedelje - ikke bruk i motoren
- NL Kettingolie - niet gebruiken in de motor
- PL Oleju do łańcucha - nie stosować w silnika
- PT Oleo da corrente - não usar no motor
- SK Retězec olej - nie pre použitie motora
- SL Olje za meč in verigo- ne uporabljajte v motorju
- SV Svärd och kedolja- Använd ej i motorn
- TR Bar ve zincir yağı - motor kullanmak yok

Back Label



ALCO'S SYNTHETIC HYDRO- FLUID

*Specifically Developed
for Hydrostatic Drive
Commercial Mowers*



1 US Quart
PART #06060



ALCO'S HYDRO-FLUID is a full synthetic premium 15w-50 multi-viscosity fluid designed for Integrated Zero-Turn Trans axles in heavy-duty commercial applications.

ALCO's Hydro-Fluid is an all weather lubricant containing excellent cold weather flow properties, providing outstanding heat resistance with anti-wear and rust and oxidation protection.

ALCO's Hydro-Fluid also provides:


- **Superb shift quality in hydrostatic transmissions**
- **High stability under thermal or oxidative stress**
- **Reduced clutch and wet brake chatter**
- **Ease in bidirectional output rotation**

CONTAINER SIZES:	6/1 U.S.Quart case
DIMENSIONS-CM (LWH):	15 x 28 x 24
CASES PER PALLET:	196
KILOGRAMS PER CASE:	6



ALCO's PREMIUM HIGH PERFORMANCE 4-STROKE ENGINE OIL

Motorcycle/ATV Engines place tough demands on motor oils—demands that automotive oils are not designed to handle. ALCO 4-Stroke Engine Oil helps you get the best performance from your motorcycle/ATV.

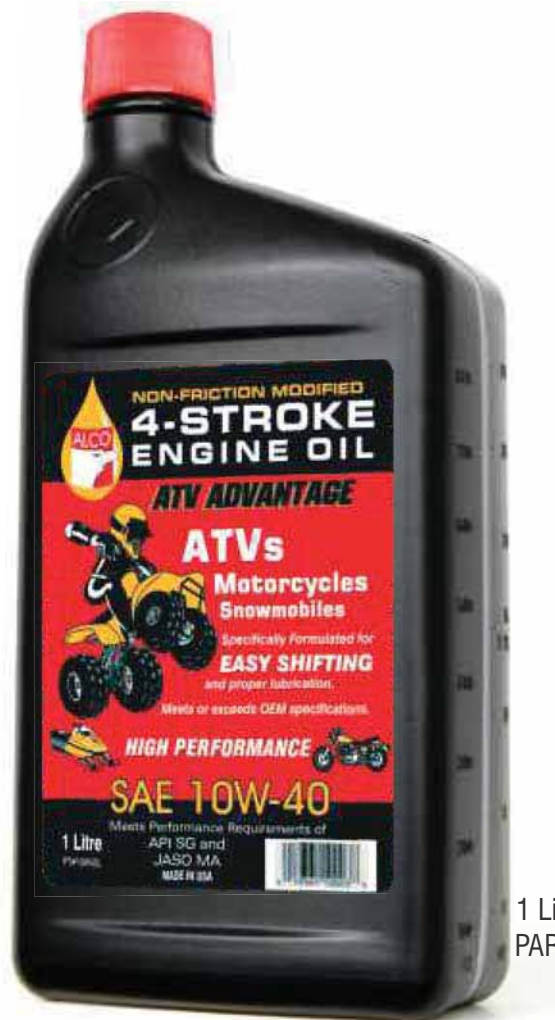

1 Litre 10W-40
PART #10W40L

ALCO's 4-Stroke Engine Oil is designed for use in 4-Stroke: Motorcycles, ATVs, Utility Vehicles & Snowmobiles.

ALCO's 4-Stroke Motorcycle/ATV Engine Oil ensures trouble-free engine, transmission and clutch performance. Its advanced additive technology provides these benefits:

- **Thermally stable formula helps maintain proper lubrication and protects engines under high RPM in the most severe operating conditions and extreme temperatures.**
- **Optimal frictional characteristics designed for integrated engine/transmissions provide smooth shifting, maximum power transfer and protection of the wet clutch.**
- **Provides excellent wear and oxidation protection, good startability, seal compatibility, high temperature endurance and reliability and is fortified with anti-varnish and anti-sludge additives.**

ALCO's 4-Stroke Motorcycle/ATV Engine Oil meets or exceeds the warranty requirements of and is compatible with OEM oils. It meets numerous OEM and industry specifications such as API SE, SF, SG and JASO MA T903 (Wet Clutch Performance) and T904 (Clutch Slippage)

CONTAINER SIZE:	12/1 Litre case
CASE DIMENSION - CM (LWH):	30 x 28 x 24
CASES PER PALLET:	98
KILOGRAMS PER CASE:	12




ALCO'S SUPER-LUBE EP-O GREASE



120 g
PART #15100

SUPER-LUBE EP-O GREASE is a high quality lithium grease containing conventional non-lead Anti-Wear (AW) and Extreme Pressure (EP) additives and a highly refined mineral base oil. This premium product has very good shear stability and gives excellent rust and oxidation protection over a wide range of operating conditions. It is recommended for chain saw sprockets, string trimmer shafts and other sprockets, gear boxes and equipment which recommend an EP-O Grease.

CONTAINER SIZES:	12/120 g case
CASE DIMENSIONS-CM (LWH):	22 X 16 X 19
CASES PER PALLET:	217
KILOGRAMS PER CASE:	2.25

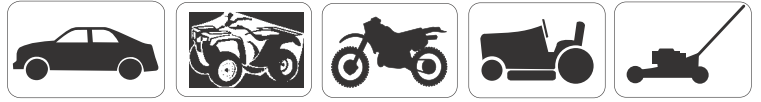

ALCO'S SUPER-LUBE HI-TEMP & MULTI-PURPOSE GREASES

400 g Tube
PART #01500



400 g Tube
PART #01400

SUPER LUBE SUPERPLEX HI-TEMP GREASE is a premium quality multi-purpose grease with outstanding high temperature and Extreme Pressure characteristics. It provides excellent lubrication over a wide range of operating temperatures and service. Dropping point exceeds 260°C. It has outstanding lubrication qualities that extend over a wide range of Heavy-Duty/Fleet applications including wheel bearings (Disc and Drum Brakes), vehicle chassis, boat trailers, universal joints, ball and roller bearings and many others. Also, it is highly resistant to separation, bleeding, and hardening. It pumps readily and is resistant to heat and cold. Other qualities include: formulation for heavy-duty service, resistance to water washout, reduction of wear under extreme loads and protection against wear and corrosion.

SUPER LUBE LITHIUM MULTI-PURPOSE GREASE NO. 2 is a light-colored, premium grade Multi-Purpose Grease. It has a Lithium soap base and has rust and oxidation inhibitors. This Multi-Purpose grease is for general automotive, farm, and light industrial applications. It is compatible with other lithium grease, but is not recommended for disc type wheel bearings. This Multi-Purpose Grease has good stability and is water resistant.

CONTAINER SIZE:	50/400 g tubes case
CASE DIMENSION - CM (LWH):	58 x 30 x 25
CASES PER PALLET:	30
KILOGRAMS PER CASE:	22.5



We compound, blend, package and market a wide variety of specialty lubricants which includes two and four-cycle engine oils for handheld power equipment, bar and chain oil, small engine oils, gear oils, hydraulic oils for industrial and ag tractor applications, as well as many others. Currently ALCO produces private-label products for a broad array of mostly OEM customers. In addition, we produce a full line of branded specialty lubricants and related products and ALCO offers a variety of packaging options ranging from 100 mL up to 200 L drums. We have over 20 years experience exporting our products throughout Europe, Asia, Africa, Australia, North America and South America.



Our manufacturing process is designed to be extremely efficient while maintaining maximum flexibility in scheduling of various package sizes and types to satisfy the many different production/delivery requirements of our customers.

ALCO receives and stores base oils, chemicals, additives, and solvents from the leading industry suppliers. Many of these components are received in tank truck and rail car quantities. Once quality control checked and approved, the bulk components are stored in one of our many bulk tanks. Formulation chemists may choose from this selection of components to formulate whatever specific lubricant is required by the customer. Once blended, the lubricant is quality controlled to the strictest standards and prepared for shipment using one of several automated packaging lines.



We manufacture and blend lubricants and related products that fall in the following item classes:

- **Synthetic 2-T Oil**
- **Semi-Synthetic 2-T Oil**
- **Petroleum 2-T Oil**
- **Four Stroke Lawnmower Oil**
- **Bar and Chain Oil**
- **Grease**
- **Passenger Car Motor Oil**
- **Diesel Engine Oil**
- **Industrial Oil**
- **Agriculture Oil**
- **Transmission Fluid**



Customer Service is ALCO's main focus. Using a thoroughly integrated computer tracking system with specially designed software, our service staff can assist customers with placing orders, estimating delivery times, providing sales history, and helping project needed inventory levels-all in minutes.



Utilizing more than 25,000 square meters of warehousing offers us the ability to better service customers and to store products for immediate shipment.

We have earned an outstanding reputation as a result of strict quality control procedures that cover all aspects of our operations, and ALCO products are ISO 9001:2008 certified and are REACH Registered.

Memberships and Associations:



- OPEI** (Outdoor Power Equipment Institute)
- ILMA** (Independent Lubricant Manufacturers Association)
- SAE** (Society of Automotive Engineers)
- ASTM** (American Society for Testing and Materials)
- NMMA** (National Marine Manufacturers Association)
- ISO** (International Standards Organization)



AMERICAN LUBRICATING COMPANY

500 Industrial Park Drive

Selmer, TN 38375 • USA

Phone: +1.901.283.1950

Email: chip@spectrumcorporation.com

www.americanlubricating.com

“Blending Engineering Excellence with Family Pride”